





IMAGO Muses Omni-Directional Microphone Array















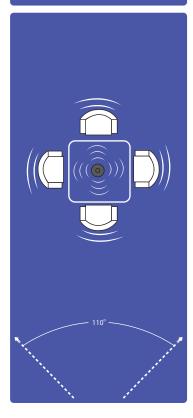

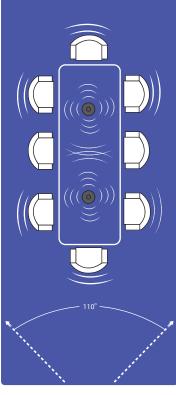

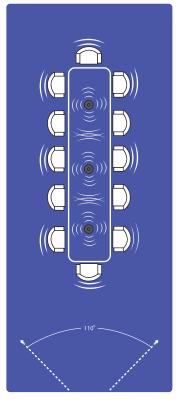

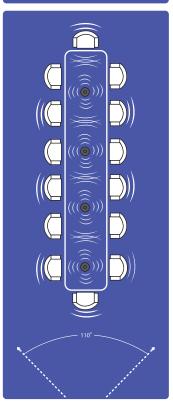

The MUSES delivers true omnidirectional performance ideal for a vast range of conference room/smart classroom settings.



Speaker ability

Speakerphone with the ability to steer the directionality of the device's microphones. This feature works in conjunction with direction finding.

Noise cancellation

Beamforming improves noise and echo cancelling, howling suppression, dynamic noise suppression as well as the overall quality of the device's pickup.





Omnidirectional microphone

Omnidirectional microphone with the ability to recognize the direction of the person speaking in the room. Equipped with 12V 1A fast charge.

Built in 5G wireless speakerphone

Built-in 2 x 5W speakerphone via 2.4 Ghz / 5 Ghz wireless or USB 2.0 connection.





Flexible relocation

Small size for easy relocation, USB Plug & Play. The LED's indicate the voice pick up & direction as well as muting. Wall Mountable.

SPECIFICATIONS

Conference Speakerphone with expansion Microphones			
Built-in Audio			
Built-in Digital silicon Microphone	Туре	Digital silicon Microphone	
	Sensitivity	Built-in Microphone : -22dBFS	
	SNR	60dB	
	Frequency response	100Hz - 16kHz	
Echo Cancellation		world-class Echo cancellation technology, echo cancellation time up to 256ms	
Noise Cancellation		>12dB	
Sampling frequency		Record: 16kHz / Playback: 48kHz	
Voice pick up range		3M	
Transmission Model		Wired, USB2.0 (Between all-in-one device and PC) Wireless, 2.4Ghz / 5Ghz (Between all-in-one device and Microphone)	
Speaker power		Double Channels 4 Wx 2	
All-in-one Device Power		9W MAX	
Control Mode		Touch button control / remote control	
Button function		ON/OFF (Baterry Check), Volume+, Volume-, speaker mute, microphone mute, scene switch	
Remote function		Audio: Volume+, Volume-, microphone mute, speaker Mute, ON/OFF Video: ZOOM+, ZOOM-, up/down/left/right movement, OSD Menu	
Status Display		Two-color LED indicator	
Power adapter		DC12V±0.2V,1A	
Working tempreture		-10 C °∼ 40 C	
Enviroment humidity		0-95% RH	
Weight		950g	

Wireless Microphone (Comes with 4 expansion Microphones)		
Туре	Digital Silicon Microphone	
Sensitivity	-26dBFS @ 1kHz 1Pa	
SN	59dB	
Frequency Response	100Hz - 16kHz	
Sampling Frequency	Record: 48kHz	
Voice pick up range	3M	
Wireless Transmission Model	2.4Ghz / 5Ghz	
Wireless Transmit Power	2.4G: 5dBm	
Microphone Power	0.2W MAX	
Charge Jack	USB type-C / Charging board contact charging	
Control Mode	Touch button control	
Button Function	On/OFF, Microphone Mute	
Status Display	Two-color LED indicator	
Power Adapter	Charging board DC5V+0.2V, 2A	
Battery	800MAH	
Standby Time	6 month	
Work Time	>8 hours	
Working Temperature	-10 -40°C	
Enviroment Humidity	0-95% RH	
Length*Weight*Height	70x49mm	
Weight	300g	

Charging Board
5V/2A
2pcs
600mA
200x100x16 (mm)
170g
USB type-C



Collaborate | Inspire | Imagine

IMAGO TECHNOLOGIES LLC

17 State Street, 40th Floor,New York, NY 10004, United States of America.

sales@imago techs.com

Follow us





Authorised Partner